




# VEER PENDANT


## Installation Instructions

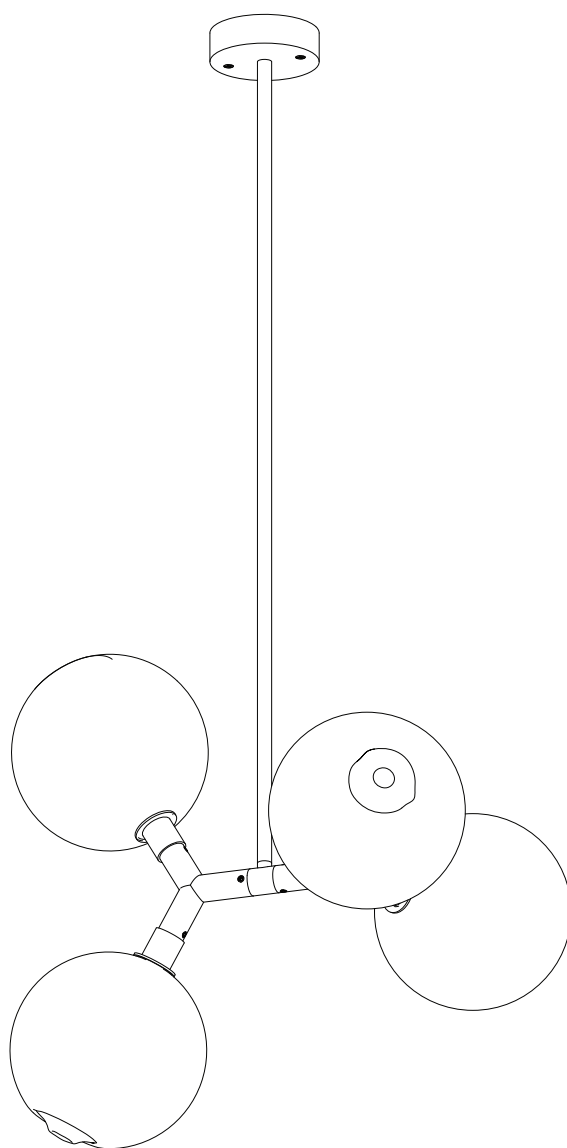

# SkLO

[sklo.com](http://sklo.com)

SkLO US 115 WEST NORTH STREET HEALDSBURG CALIFORNIA 95448 USA +1.707.385.2101 [us@sklo.com](mailto:us@sklo.com)  
SkLO EU VÁŽNÍ 488 500 03 HRADEC KRÁLOVÉ CZECH REPUBLIC +420.495.542.071 [eu@sklo.com](mailto:eu@sklo.com)




## VEER PENDANT










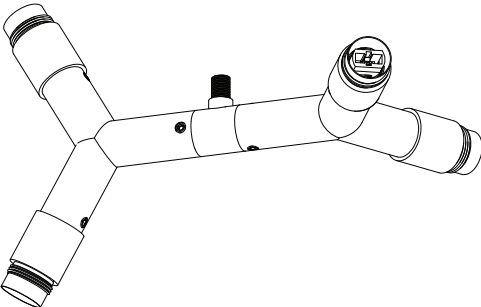
*Congratulations on your purchase of a SkLO Veer Pendant. This product must be installed in accordance with the applicable codes by a person familiar with the construction and operation of the product and the hazards involved, preferably a licensed electrician. Use a maximum 7W bulb.*

**When unpacking individual items and parts of the light fixture, make sure to lay them out on a protective surface that will neither mar the delicate metal finishes nor scratch the glass. Gloves (nitrile) are provided and must be worn during installation to avoid fingerprints on the finish of the exposed metal parts.**

*Your SkLO fixture will arrive with the hand-blown glass elements packed separately from the light fixture itself.*

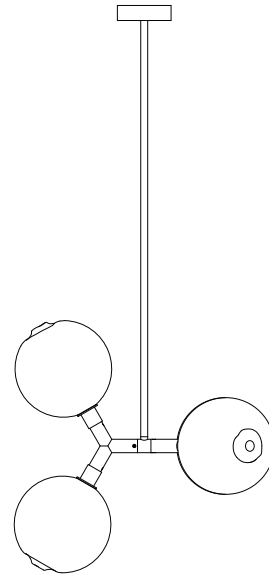

### CONTENTS:


Canopy	Hexagonal nut	Lock washer	Screw	Wire connector
				
Stem	1x Glass sphere	1x Grounding lug	1x Light bulb	2x 3x
				
	1x Electrical assembly	4x	1x	4x
				
	1x		1x	




1. Carefully feed the exposed wires at the top of the brass electrical assembly through the stem with the female / internal thread facing down. Attach the stem to fixture by threading on to the exposed nipple at the top of the electrical assembly (Figure 1). The brass electrical assembly has a threaded sockets at all four arms.
2. Feed the wires through the central hole in the canopy. Use supplied lockwasher and nut to attach the grounding loop to the canopy and secure the canopy to the threaded nipple at the top of the stem (Figure 2).
3. Carefully supporting the fixture, connect the exposed leads of the fixture to the exposed leads on the ceiling following the wiring diagram and using the provided wire connectors. Attach the ground (TE) wires to ground (TE) wires of the light fixture, phase 1 (L1) to phase 1 (L1) of the light fixture, neutral (N) to neutral (N) of the light fixture (Figure 3). Please note the number and type of wire connectors may vary.
4. The canopy installs directly to the ceiling. Anchors or other accessories appropriate for both the provided fasteners and the ceiling material/structure and weight of the fixture may be required (not provided). Align the canopy and carefully raise the supported fixture all the way flush to the ceiling taking care that no electrical cables or connections are exposed where the canopy meets the ceiling. Fasten the canopy to the ceiling by screwing the two provided screws through the countersunk holes provided in the canopy, making sure that the canopy sits flush against the ceiling finish surface (Figure 4). Take great care when installing screws so that tools do not slip and scratch the canopy finish, or damage the exposed screw head slots.
5. Install the supplied LED light bulbs (7W Max) into the sockets. This fixture uses G9 sockets and light bulbs. The G9 is a bi-pin socket. Light bulbs are to be inserted and removed by pushing the bulb straight into the socket, and by pulling it straight out. The bulb, when inserted, should have a tight fit. Do not force the bulb. If there is resistance, check to make sure nothing inside the socket is bent or obstructing the bulb. Always turn off the power to the fixture when changing the bulb(s). Unwrap and lay out four glass diffusers. Carefully thread a glass diffuser onto each socket (Figure 5). Thread on the glass diffusers just until they are visually tight – do not overtighten.




1.

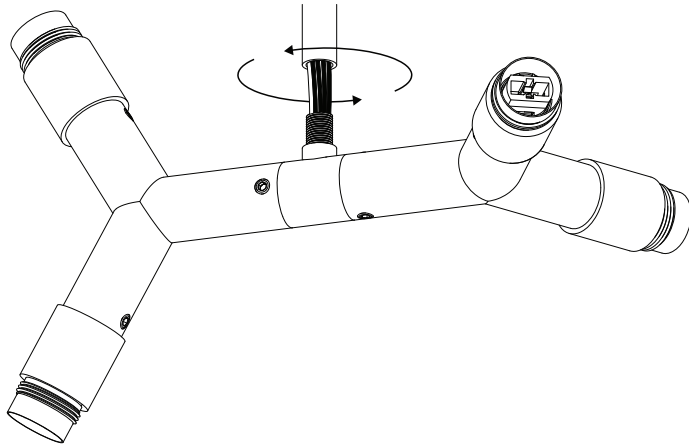


2.

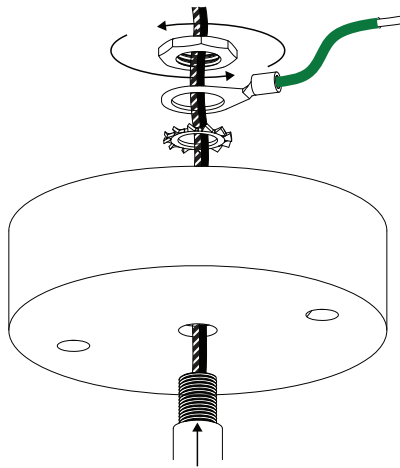

3.

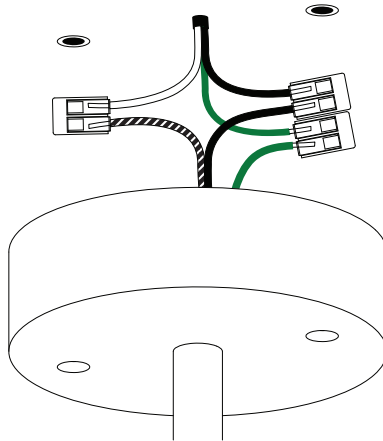

4.

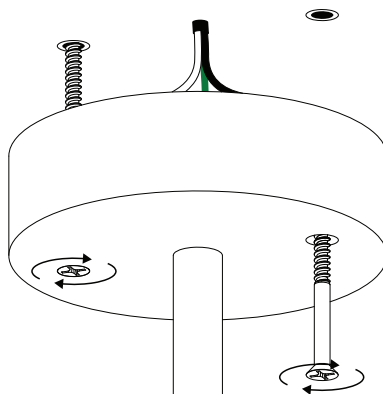



5.

