




MARCHESA SCONCE

Installation Instructions

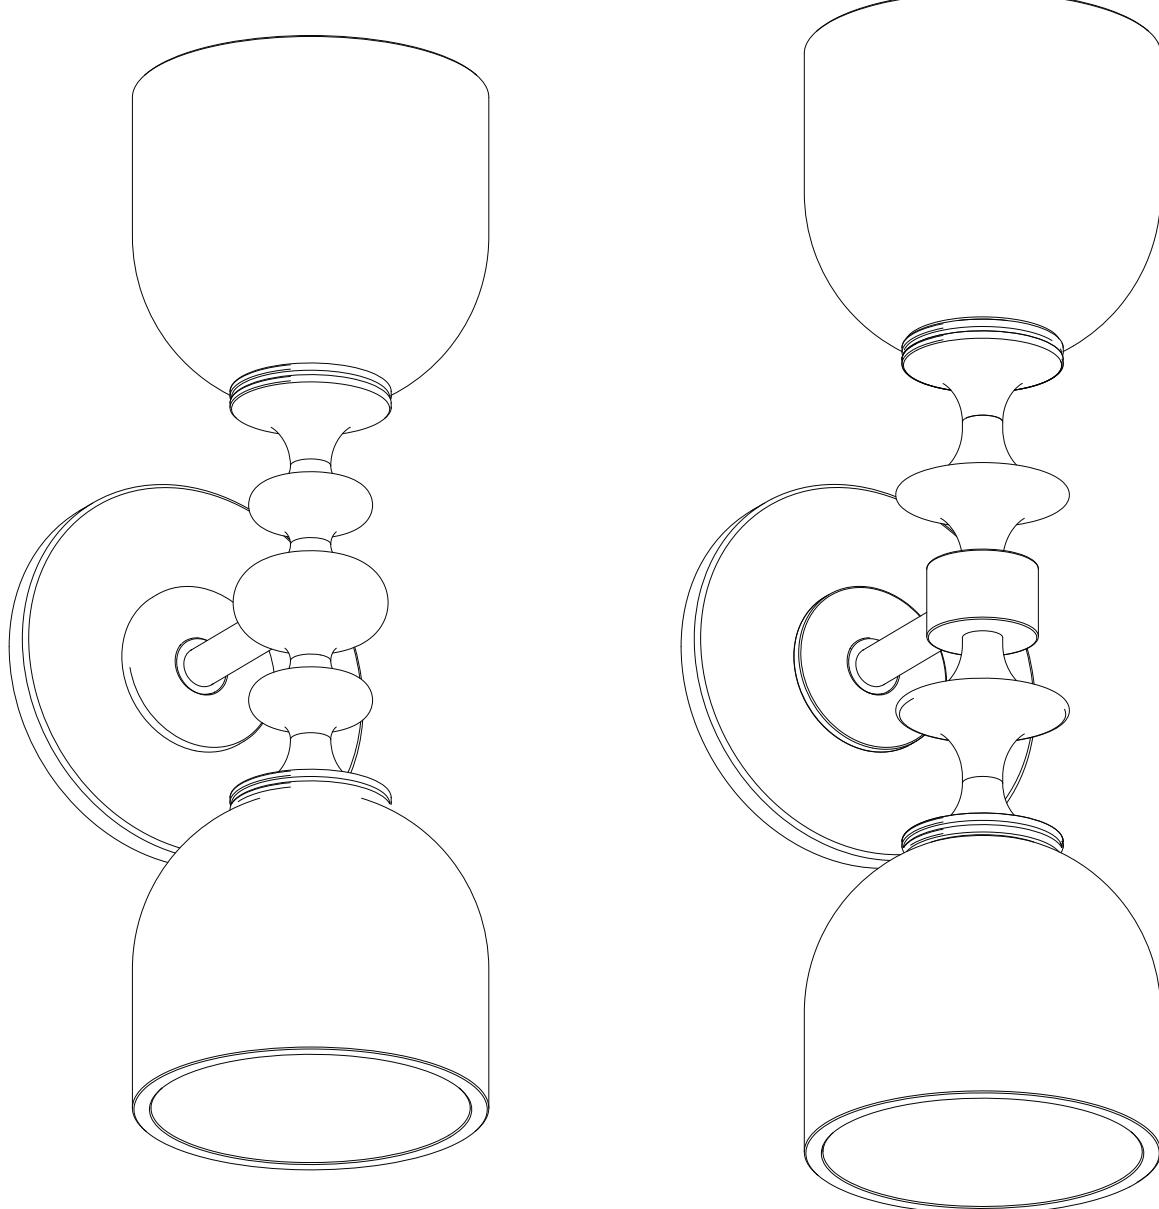

SkLO

sklo.com

SKLO US 115 WEST NORTH STREET HEALDSBURG CALIFORNIA 95448 USA +1.707.385.2101 us@sklo.com

SKLO EU BRATŘÍ ŠTEFANŮ 902/71 500 03 HRADEC KRÁLOVÉ CZECH REPUBLIC +420.495.542.071 eu@sklo.com




IP20

MARCHESA SCONCE

Congratulations on your purchase of a SkLO + AvroKO Marchesa Sconce. This product must be installed in accordance with the applicable codes by a person familiar with the construction and operation of the product and the hazards involved, preferably a licensed electrician. Use a maximum 7W bulb.


When unpacking individual items and parts of the light fixture, make sure to lay them out on a protective surface that will neither mar the delicate metal finishes nor scratch the glass. Gloves (nitrile) are provided and must be worn during installation to avoid fingerprints on the finish of the exposed metal parts.

Your fixture will arrive with the hand-blown glass elements packed separately from the light fixture itself.

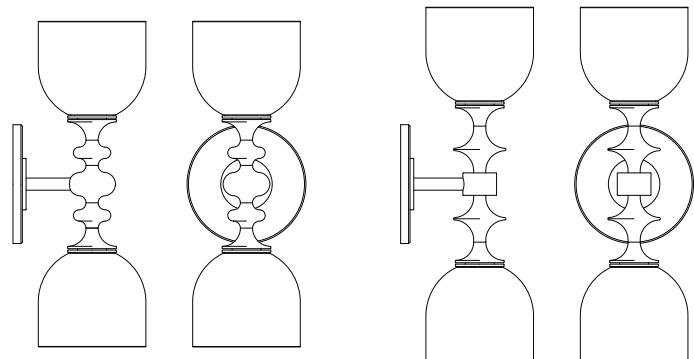

CONTENTS:

Fixture weight is approximately 2 kg

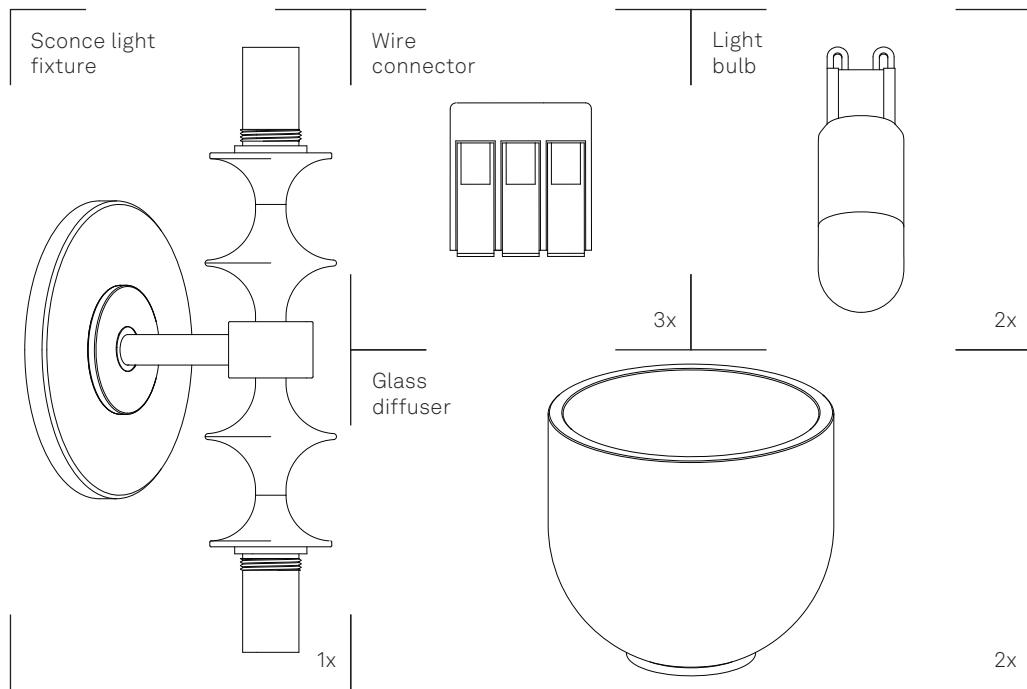



1. This fixture does not provide an internal wiring compartment for making electrical connections – installation requires a recessed electrical box of minimum 40 mm diameter, with a minimum depth of 40 mm. Installation directly to recessed electrical box requires a box with mounting holes at maximum 89 mm on center spacing.

Pendant can be mounted :

a. Directly to recessed electrical box:

Pre-screw appropriate flanged hex head fasteners into the recessed electrical box. Do not fully tighten leave enough space to be able to hang the mounting plate over the screw. (Figure 1a). Ensure that the recessed electrical box used has a load capacity adequate to support the weight of the fixture, in accordance with the manufacturer's specifications.

b. Directly to wall: Pre-screw appropriate flanged hex head fasteners or anchors (not provided), suitable for the ceiling material and capable of supporting the weight of the fixture, must be installed (Figure 1b).








2. Carefully unscrew the canopy (A) nut and slide it together with canopy (B) along the stem (Figure 2). Take great care so that they do not slip and scratch the stem or other parts of the Sconce Assembly.
3. Trim any excess fixture wires leaving sufficient length to make the electrical connections. Connect the exposed leads of the fixture to the exposed leads in the electrical box, following the wiring diagram and using the provided wire connectors (Figure 3). Attach the ground lead (\pm) to the ground wire (\pm) in the electrical box. Attach the fixture phase 1 (L1) wire to the phase 1 (L1) wire in the electrical box. Attach the fixture neutral (N) wire to the neutral (N)

wire in the electrical box. Please note the number and type of wire connectors may vary. Carefully replace all electrical wiring and connectors back into the electrical box.

4. Carefully position the Sconce Light Fixture over the recessed electrical box (REB) so that the slots on mounting plate are aligned with the pre-installed screws in the REB. Carefully slide the mounting plate over the screws (Figure 4a, 4c) and twist the entire assembly in counterclockwise direction so that the Sconce Light Fixture sits vertically (Figure 4b, 4d). Take care that no electrical cables or connection are exposed where the mounting meets the REB. Once in vertical position fully tighten the screws using the wrench (Figure 4e). Carefully screw back the canopy until it sits fully flush against the wall (Figure 4f). Take great care when installing canopy nut so that it does not slip and scratch the canopy finish.


The mounting plate on the Sconce Light Fixture is positioned at 45 degrees to fit the REB with diagonally placed mounting screws. For a REB with differently placed mounting screws, the mounting plate needs to be adjusted. Using a wrench, slightly loosen the nut at the back side of the mounting plate (do not fully unthread it). Adjust the mounting plate to a suitable position for the REB being used, then fully tighten the nut at the back side of the mounting plate.

5. Remove the protective packaging from the brass sockets and install the supplied Light Bulbs (7W Max) into the sockets. Always turn off the power to the fixture when changing the bulb. Unwrap and lay out the Glass Diffusers. One at the time carefully thread two Glass Diffuser onto Sconce Light Fixture. Thread until visually tight – do not overtighten (Figure 5).

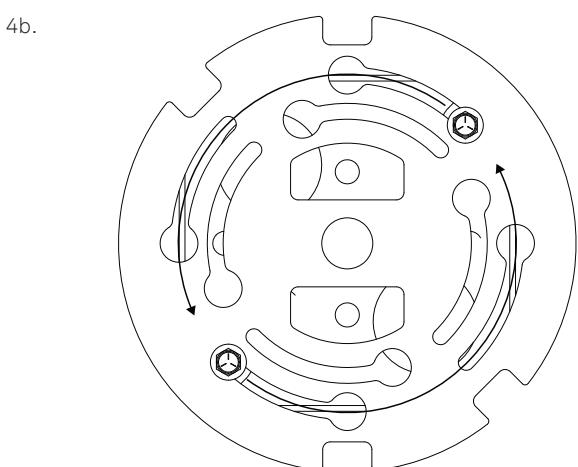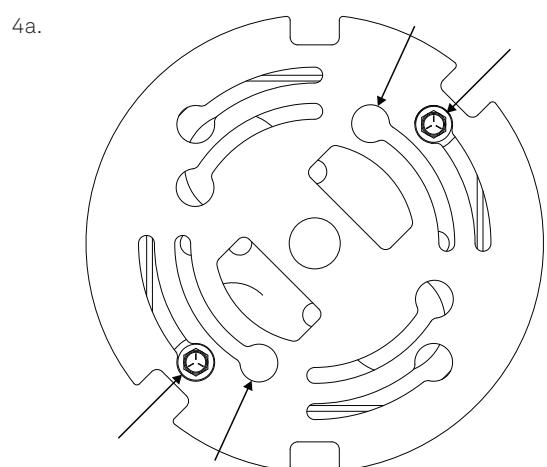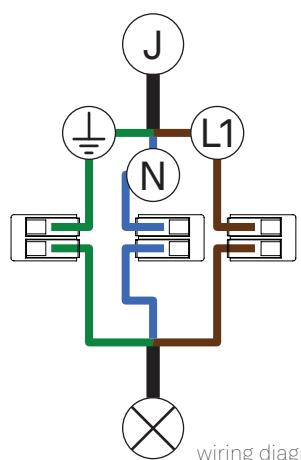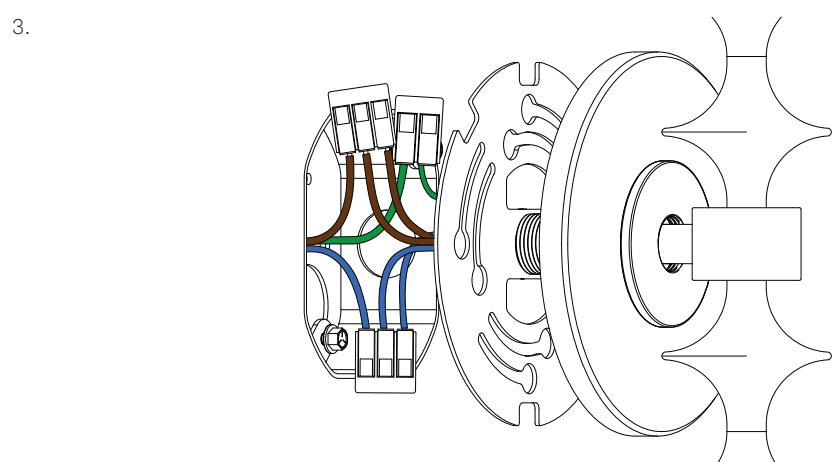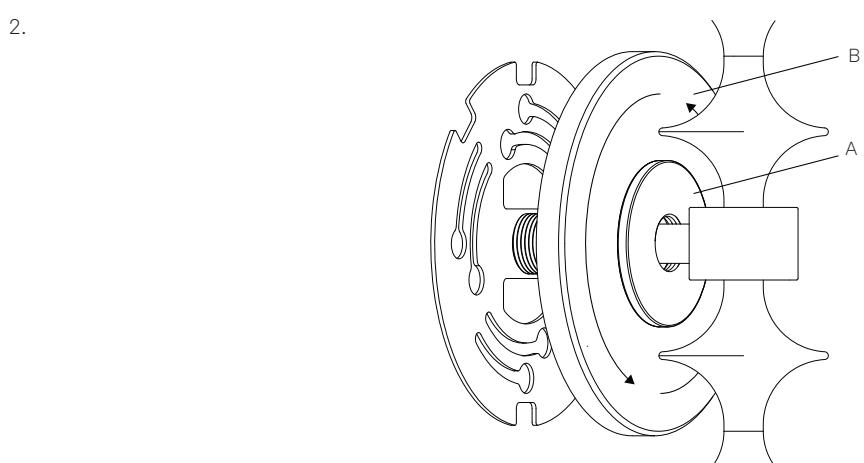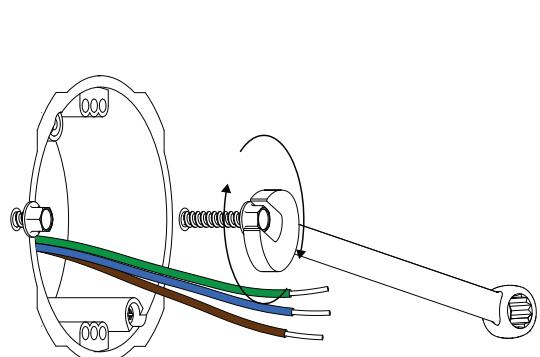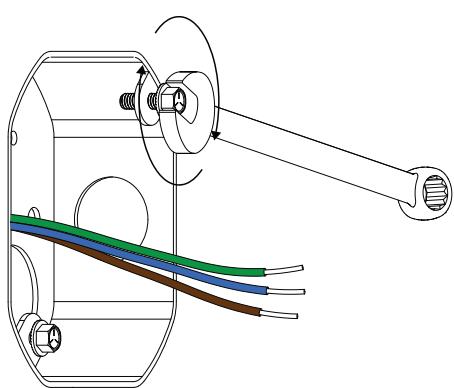





4c.

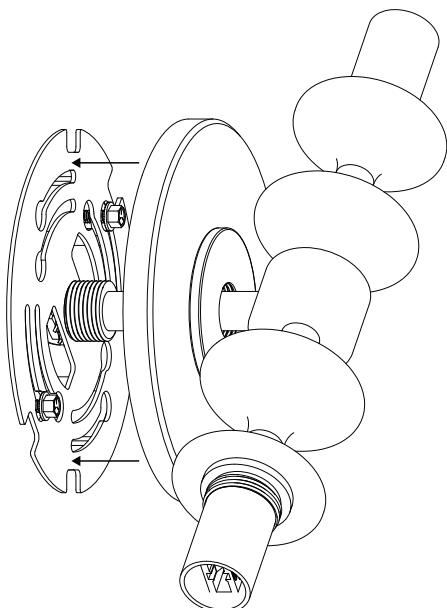


4d.

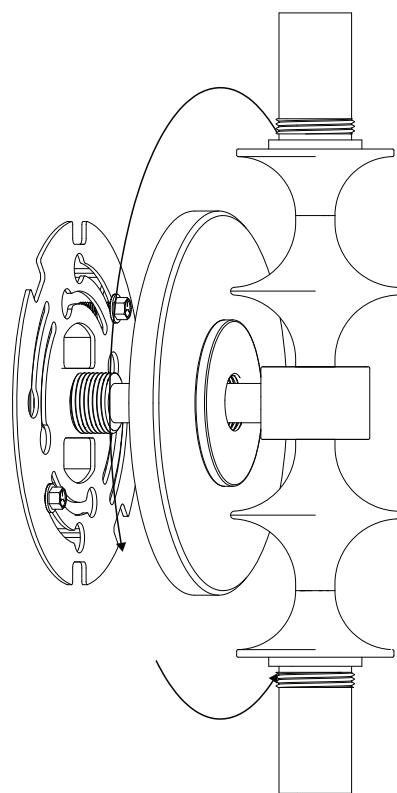

4e.

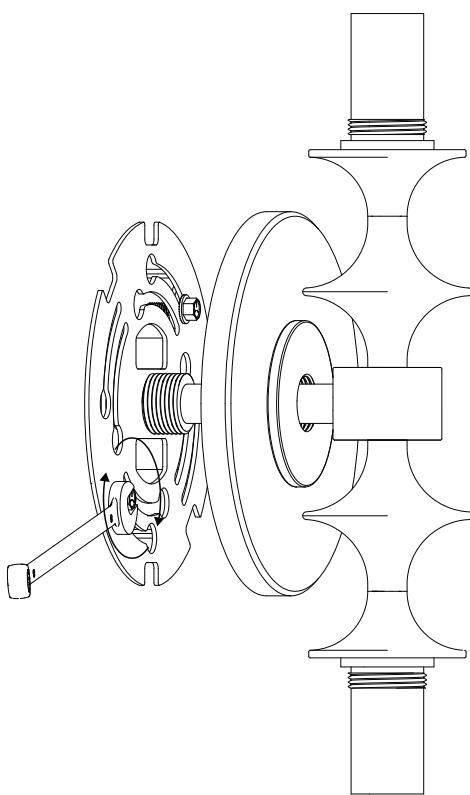

4f.

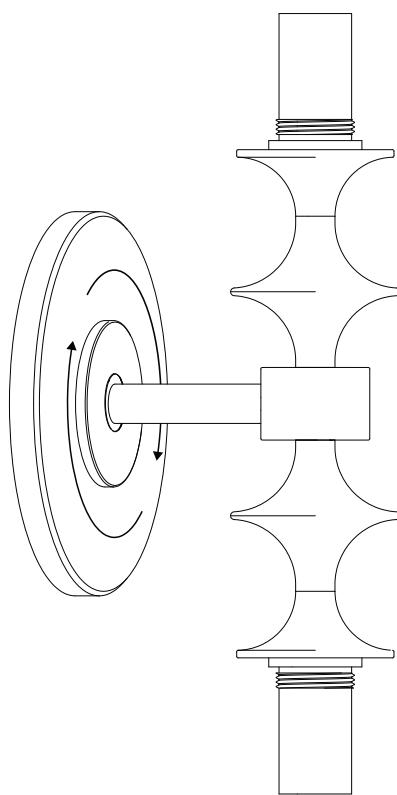



5.

