




# DEW PENDANT - INSTALLATION INSTRUCTIONS



**GLOVES (NITRILE) ARE PROVIDED AND MUST BE WORN DURING INSTALLATION TO AVOID FINGERPRINTS ON THE FINISH OF THE EXPOSED METAL PARTS.**

Congratulations on your purchase of a SkLO Dew pendant light. This product must be installed in accordance with the applicable codes by a person familiar with the construction and operation of the product and the hazards involved, preferably a licensed electrician. Use maximum 7W bulb.

- 1 Your SkLO Dew pendant light will arrive with the hand blown glass element already attached to the light fixture. This attachment is meant to be permanent and should not require adjustment. Do not remove the glass element or loosen the screws holding it in place.
- 2 Your Dew pendant light will also arrive with the brass cylindrical cover in place over the fixture. Do not remove - leave this in-place until the end of assembly.
- 3 Attach stem/canopy to fixture if shipped unassembled. Feed electrical wiring through stem. Attach the female/internally threaded stem end by threading on to the exposed nipple at the top of the fixture. Attach stem and canopy to fixture if they are not already assembled. Then, connect the canopy by passing the threaded nipple at the other end of the stem through the center hole of the canopy and tightening the provided lock washer and nut(s) onto the nipple.
- 4 Install the universal cross bar (provided) to the recessed electrical box with the provided 8/32 thread screws.
- 5 Carefully supporting the fixture, connect the exposed leads on the fixture to the leads in the electrical box according to the wiring diagram (right).
- 6 Install light by screwing the two provided 1" long 8/32 thread machine screws directly into the appropriate holes in the crossbar through the holes provided in the canopy, making sure that canopy sits flat and flush against finish surface.
- 7 Install the supplied light bulb: To install or change a light bulb, carefully slide the brass cylindrical cover up over the fixture and hold it with one hand while using the other hand to install or change the light bulb into the socket. When the light bulb is in place, carefully slide the cover back down onto the fixture just so it aligns with the bottom of the brass fixture. The cover is designed to be a friction fit.

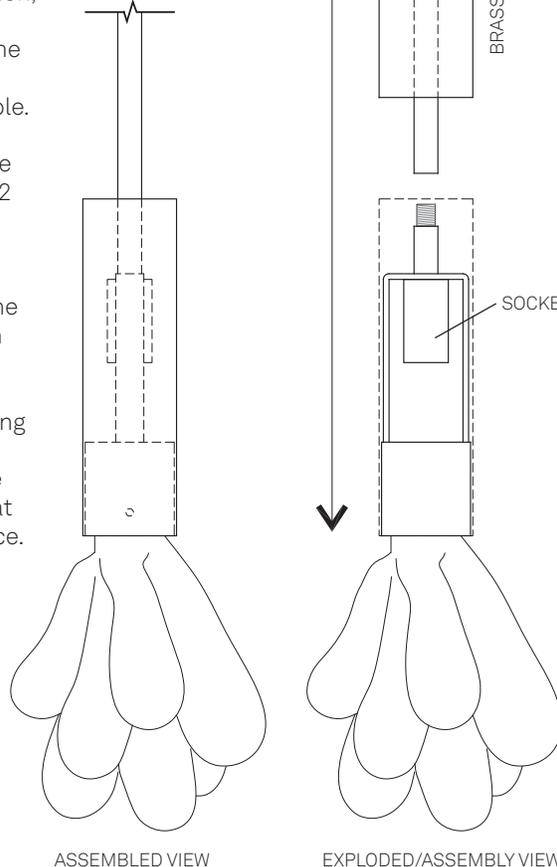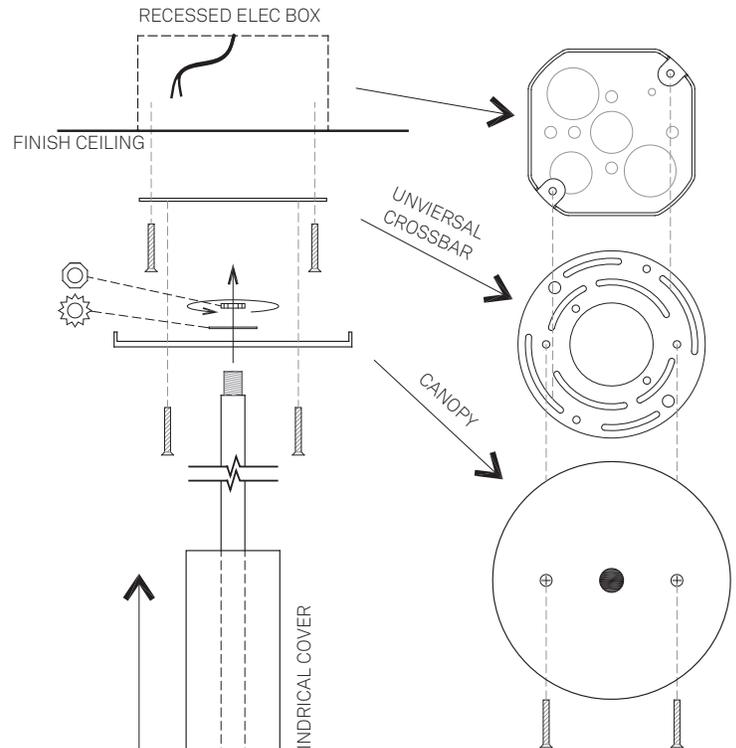

# SkLO

sklo.com

SkLO US us@sklo.com 115 WEST NORTH STREET HEALDSBURG CALIFORNIA 95448 USA 001.707.591.4119  
 SkLO EU eu@sklo.com VÁŽNÍ 488 500 03 HRADEC KRÁLOVÉ CZECH REPUBLIC 420.495.542.071