

DRAPE PENDANT - INSTALLATION INSTRUCTIONS



GLOVES (NITRILE) ARE PROVIDED AND **MUST BE WORN DURING INSTALLATION TO AVOID FINGERPRINTS ON THE FINISH OF THE EXPOSED METAL PARTS.**

This product must be installed in accordance with the applicable codes by a person familiar with the construction and operation of the product and the hazards involved, preferably a licensed electrician. Use maximum 7W bulb.

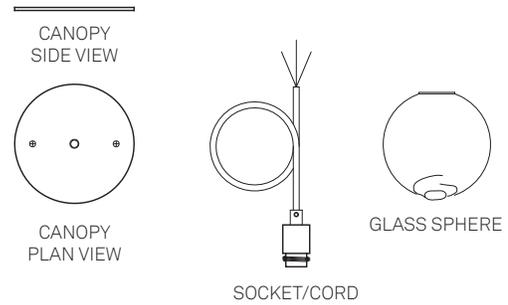


Figure 1. Parts of the Light Fixture Assembly

- 1 Uncoil and gently smooth the fabric-wrapped electrical cord of the pendant. Determine the desired length of the cord and trim it, making sure to leave enough additional length to make the wiring connections inside the recessed electrical box. When trimming the fabric-wrapped electrical cord make sure to use electrical tape or other means to secure the fabric at the location of the cut, and then at the cut end to avoid splaying or fraying or slack in the fabric.
- 2 Pass the fabric-wrapped electrical cord through the hole in the canopy. Use the provided strain relief to fix the length of the cord. Do not over-crimp the strain relief or damage the electrical cord.
- 3 Carefully supporting the fixture, connect the exposed leads of the fixture to the leads in the electrical box according to the wiring diagram (Figure 2) using the wire connectors provided.
- 4 This pendant requires an electrical box with available holes at 3 1/2" on center spacing. If a box with differently spaced threaded holes is present, additional parts may be required to install the fixture properly, such as a universal cross bar (not supplied). Install the canopy by fastening the two supplied 8/32 thread brass machine screws directly into the appropriate holes in the electrical box through the holes in the canopy, making sure that canopy sits flat and flush against finish surface.
- 5 Install the supplied LED light bulbs (7W Max) into the sockets.
- 6 Carefully thread the sphere onto the socket. Do not overtighten.

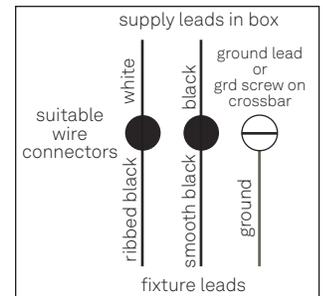


Figure 2. Wiring Diagram

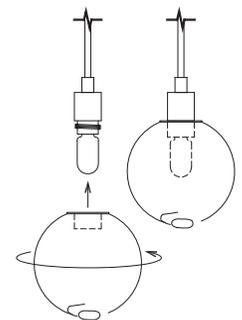


Figure 3. Install glass sphere by threading onto brass sockets