




VEER PENDANT

Installation Instructions






Congratulations on your purchase of a SkLO Veer Pendant. This product must be installed in accordance with the applicable codes by a person familiar with the construction and operation of the product and the hazards involved, preferably a licensed electrician.

When unpacking individual items and parts of the light fixture, make sure to lay them out on a protective surface that will neither mar the delicate metal finishes nor scratch the glass. Gloves (nitrile) are provided and must be worn during installation to avoid fingerprints on the finish of the exposed metal parts.

Your SkLO fixture will arrive with the hand blown glass elements packed separately from the light fixture itself.

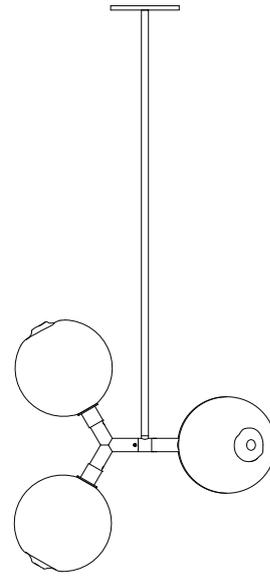

CONTENTS:

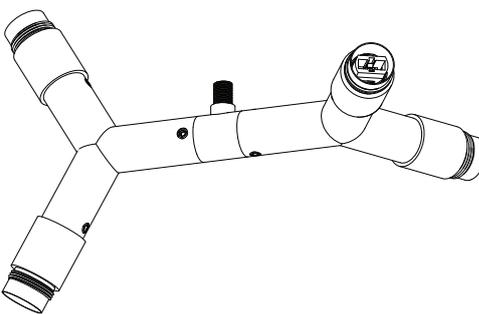
Canopy	Universal crossbar	Hexagonal nut	Lock washer	
				
	1x	1x	1x	1x
Stem	Glass sphere	Grounding loop	Light bulb	
				
	1x	4x	1x	4x
	Electrical assembly			
				
	1x		1x	




1. Carefully feed the exposed wires at the top of the brass electrical assembly through the stem with the female / internal thread facing down. Attach the stem to fixture by threading on to the exposed nipple at the top of the electrical assembly (Figure 1). The brass electrical assembly has a threaded sockets at all four arms.
2. Feed the wires through the central hole in canopy. Use supplied lockwasher and nut to attach the grounding loop to the canopy and secure the canopy to the threaded nipple at the top of the stem.(Figure 2)
3. Install the universal cross bar (provided) to the recessed electrical box with the provided 8/32 thread screws so that the 8/32 threaded holes spaced 2 3/4" on-center on the cross-bar match the desired orientation of the fixture based on the countersunk holes in the canopy. (Figure 3)
4. Connect the exposed leads of the fixture to the leads in the electrical box according to the wiring diagram using the wire and wire connectors provided (Figure 4).
5. The canopy installs directly to the crossbar. The back of the canopy is recessed to fit over the crossbar and sit flush against the ceiling finish surface. Take care that no electrical cables or connections are exposed where canopy meets ceiling. Fasten the canopy to the cross bar by screwing the two provided 1" long 8/32 thread machine screws directly into the 8/32 threaded holes spaced 2 3/4" on-center on the crossbar through the countersunk holes provided in the canopy, making sure that the canopy sits flush against the ceiling finish surface (Figure 5). Take great care when installing machine screws so that tools do not slip and scratch the canopy finish, nor damage the exposed screw head slots.
6. Install a light bulb in each socket (provided - 7W Max). Unwrap and lay out four glass diffusers (spheres). Carefully thread a glass diffuser onto each socket (Figure 6). Thread the glass diffusers on just until they are visually tight - do not overtighten.




1.

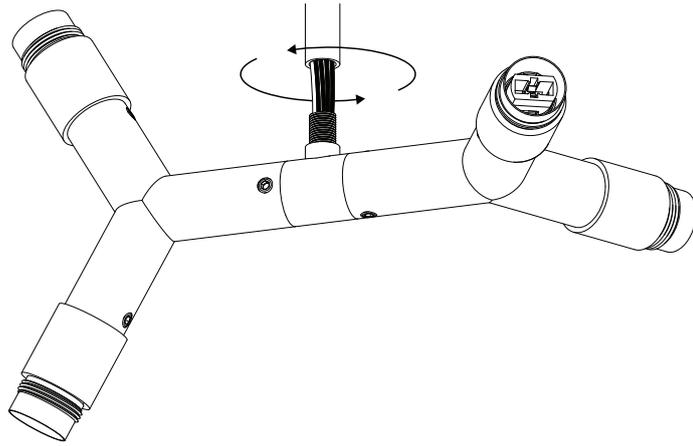


2.

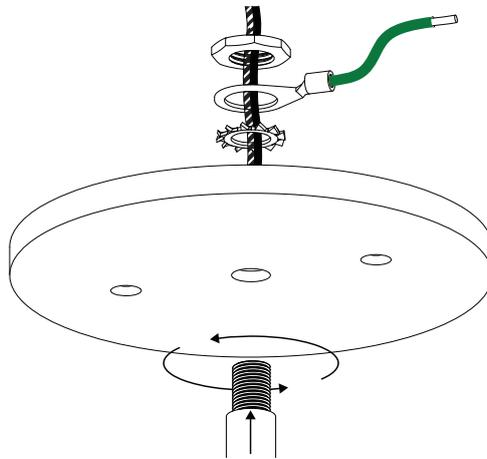

3.

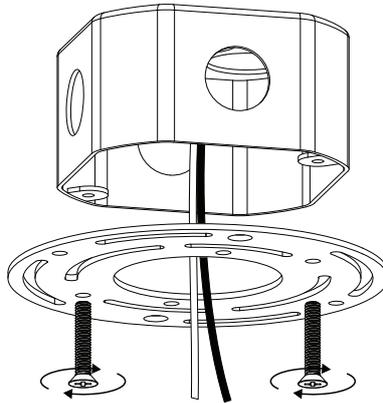


4.

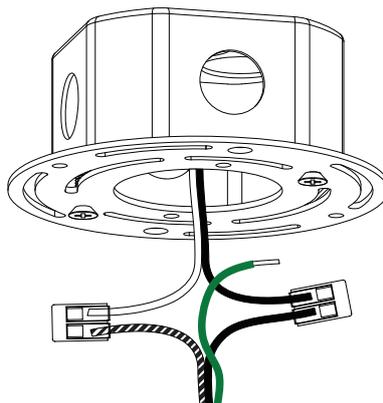





5.

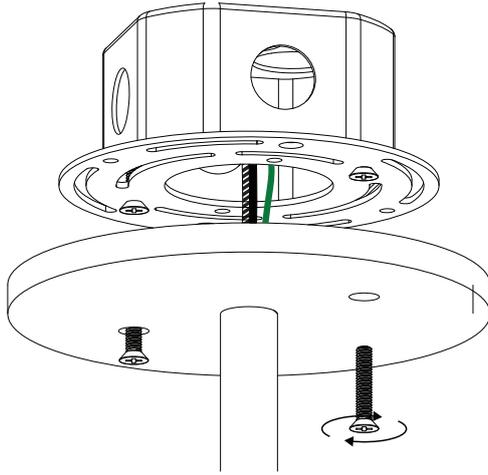

6.

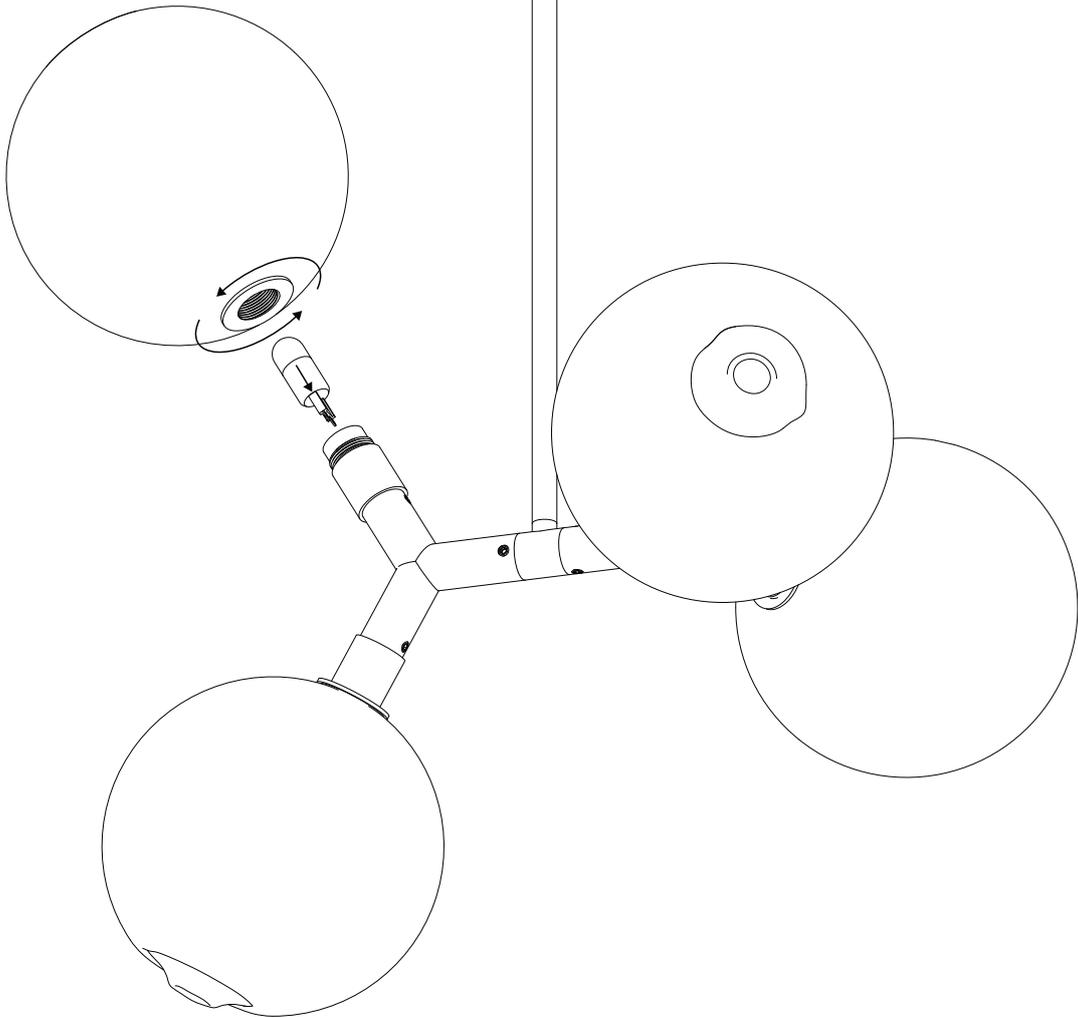

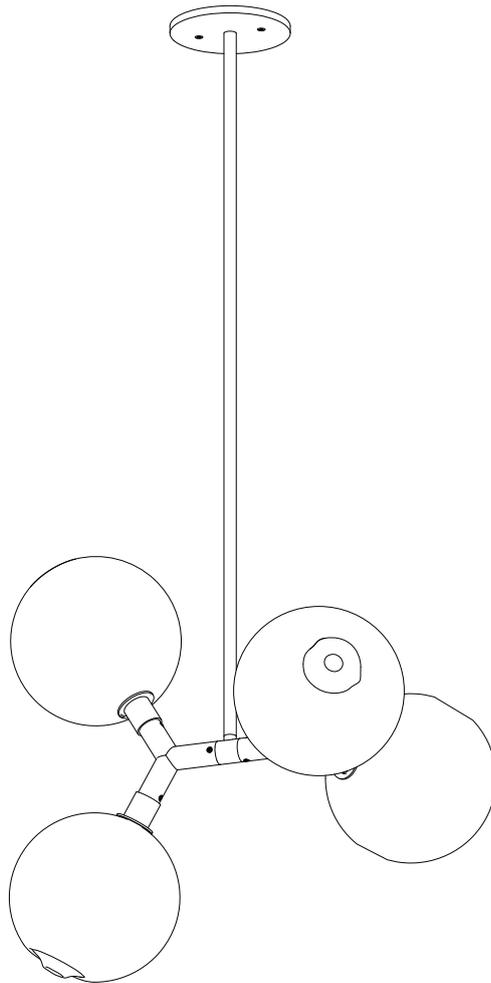

SkLO

sklo.com

SkLO US 115 WEST NORTH STREET HEALDSBURG CALIFORNIA 95448 USA +1.707.385.2101 us@sklo.com
SkLO EU VÁŽNÍ 488 500 03 HRADEC KRÁLOVÉ CZECH REPUBLIC +420.495.542.071 eu@sklo.com