




LASSO 1.0 PENDANT

Installation Instructions

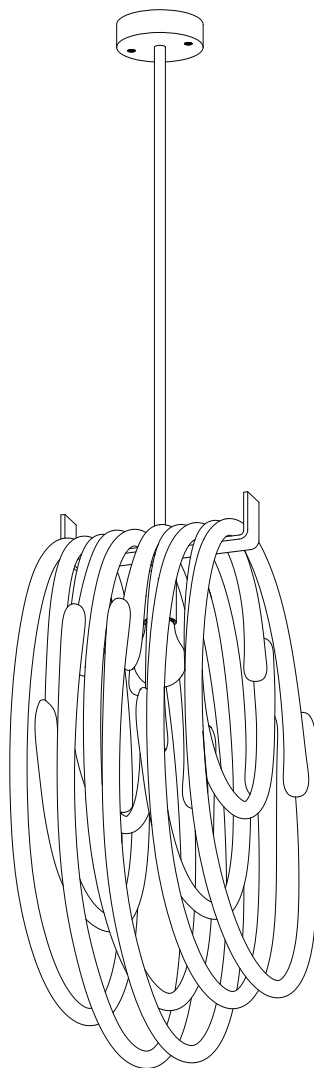

SkLO

sklo.com

SkLO US 115 WEST NORTH STREET HEALDSBURG CALIFORNIA 95448 USA +1.707.385.2101 us@sklo.com
SkLO EU VÁŽNÍ 488 500 03 HRADEC KRÁLOVÉ CZECH REPUBLIC +420.495.542.071 eu@sklo.com




LASSO 1.0 PENDANT












Congratulations on your purchase of a SkLO Lasso 1.0 Pendant. This product must be installed in accordance with the applicable codes by a person familiar with the construction and operation of the product and the hazards involved, preferably a licensed electrician. Use a maximum 60W bulb.

When unpacking individual items and parts of the light fixture, make sure to lay them out on a protective surface that will neither mar the delicate metal finishes nor scratch the glass. Gloves (nitrile) are provided and must be worn during installation to avoid fingerprints on the finish of the exposed metal parts.

Your SkLO fixture will arrive with the hand-blown glass elements packed separately from the light fixture itself.

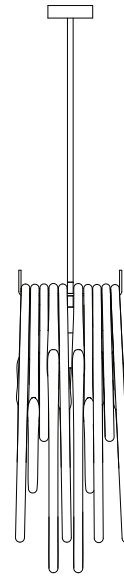

CONTENTS:

Canopy + stem 	Additional stem segment (longer OAD lengths only) 	Pre-wired light fixture 	Screw 	Anchor 
1x	quantity varies	1x	2x	2x
Wire connector 	Light bulb 	Glass element 	Glass element 	
3x	2x	2x	4x	
Glass element 	Glass element 			
2x	2x			



1. The light fixture assembly (minus the glass) will consist of a pre-wired light fixture (hook that supports the glass and a socket) and a canopy with a rigid brass stem. Unpack the metal light fixture first and leave the glass packed until the light is installed.
2. Uncoil the electrical wiring at the top of the fixture and carefully pass the wires through the stem and canopy. Then, attach the female/internally threaded stem to the fixture by threading the open end of the stem onto the exposed threaded nipple on the top of the fixture (Figure 1a).

For lights with longer OAD lengths, the stem will be in multiple parts. Uncoil the electrical wiring at the top of the fixture and carefully pass the wires through each stem as you fasten them together and then the canopy at the end. To connect the stems, first, attach one of the lengths of the stem to the fixture by threading the open female/internally threaded end of the stem onto the exposed threaded nipple on the top of the fixture (Figure 1a). Then, attach the remaining stem lengths by threading the open end of each stem onto the exposed nipple of the other (Figure 1b).

3. Connect the exposed leads of the fixture to the exposed leads on the ceiling following the wiring diagram and using the provided wire connectors. Attach the ground (TE) wires to ground (TE) wires of the light fixture, phase 1 (L1) to phase 1 (L1) of the light fixture, neutral (N) to neutral (N) of the light fixture (Figure 2a). Please note the number and type of wire connectors may vary.
4. The canopy installs directly to the ceiling. Anchors or other accessories appropriate for both the provided fasteners and the ceiling material/structure and weight of the fixture may be required (not provided).

Align the canopy and carefully supported fixture all the way flush to the ceiling taking care that no electrical cables or connections are exposed where canopy meets the ceiling. Fasten the canopy to the ceiling by screwing the two provided screws through the countersunk holes provided in the canopy (Figure 2b). Take great care when installing screws so that tools do not slip and scratch the canopy finish, nor damage the exposed screw head slots.


5. Install the supplied LED light bulb (60W Max) into the socket (Figure 3).
6. Carefully unpack and lay out the hand-blown glass “lasso” elements on a protective/padded surface. The “lassos” will arrive in two boxes. Each box contains a unique set of five individual “lassos” of different sizes and proportions. Install one set on each side of the hook. Working one at a time, install the “lasso” elements by hanging them on the hook of the light fixture (Figure 4). NOTE: When installing glass “lasso” elements, alternate sides so as to maintain balance – do not fully load one side with glass at a time. Mix the different sizes of glass “lassos” and also the orientations of the glass joints randomly during installation. Note the “lassos” are meant not to fit perfectly – they are meant to “crowd” on the hooks – it is part of the look of the piece.

PLEASE NOTE: If the electrical cord of this luminaire is damaged, it must be replaced exclusively by the manufacturer, its service technician, or a person with the same qualifications to prevent the danger of electric shock and/or injury.


ALWAYS REMOVE THE GLASS “LASSO” ELEMENTS BEFORE UNFASTENING THE CANOPY FROM THE RECESSED ELECTRICAL BOX FOR AN INSPECTION OF THE ELECTRICAL CONNECTIONS OR UNFASTENING OF THE FIXTURE.




1a.

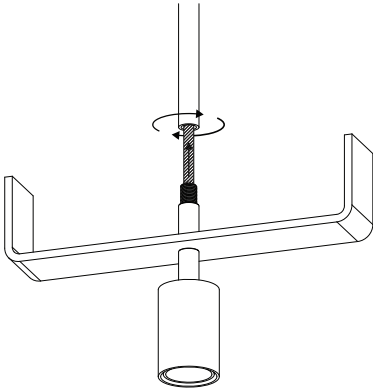


1b.

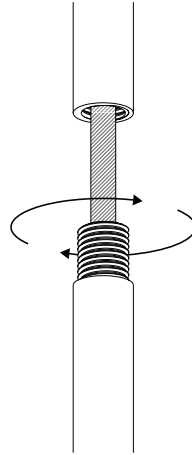


2a.

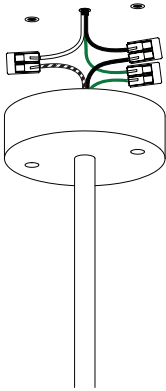

2b.

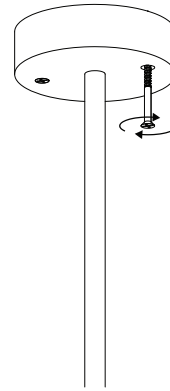

3.

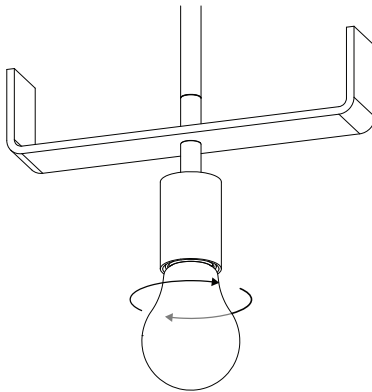



4.

