



## SKLO INSTRUCTIONS: POOL WALLPIECE

- 1 Unpack the glass *Pool* wallpieces and the steel wall hooks. Make sure to lay them out on a protective surface that will neither mar the delicate metal finishes nor scratch the glass. Gloves are recommended for installation, either cotton/cloth or nitrile gloves, to avoid fingerprints. Cleaning the individual *Pools*
- 2 *Pool* wall hooks come in two sizes (*Figure 1*). Sort your wall hooks into two groups based on size. The two sizes/lengths of wall hook allow for the slight layering and overlapping of the *Pool* wallpieces. The largest size of *Pool* wallpiece (24" / 61cm) should only be mounted using the shorter of the two hooks. The other three sizes of *Pool* wallpieces can be hung on either the short or long hooks.
- 3 Drywall anchors and screws are provided by SkLO as a courtesy and are not appropriate or sufficient for all wall surfaces, finishes and/or substrates. Determination of the required fastener and/or anchor type(s) must be made for the specific wall surface, finish and/or substrate. SkLO does not take responsibility for determining the type of fastener required.
- 4 If you are hanging multiple *Pool* wallpieces, start by locating the largest size *Pools* and hanging them first, using the short hooks. Then, hang all of one size *Pool*, going from largest to smallest, using different lengths of hook depending on the desired layering effects and locations. Hang multiple *Pool* wallpieces one at a time according to the desired composition - do not try to locate and install all the hooks at once and then just hang glass on them. One at a time allows minor adjustments to be made as you go, allowing for the variations in the hand blown glass *Pool* wallpieces themselves.
- 5 With the hook mounted to the wall in the location chosen, back the thumbscrew almost all the way out, making sure to stop before forcing off the small rubber cap on the end of the screw thread. Orient the *Pool* wallpiece such that the side where the glass protrudes at the central opening will be facing the wall, and gently hang it on the hook such that the hook goes through the central hole (*Figure 2*).
- 6 Reaching between the wall and the *Pool* wallpiece, carefully tighten the thumbscrew so that it holds the *Pool* wallpiece as plumb and flat as possible (*Figure 3*). Do not overtighten this screw or you risk chipping or cracking the glass.

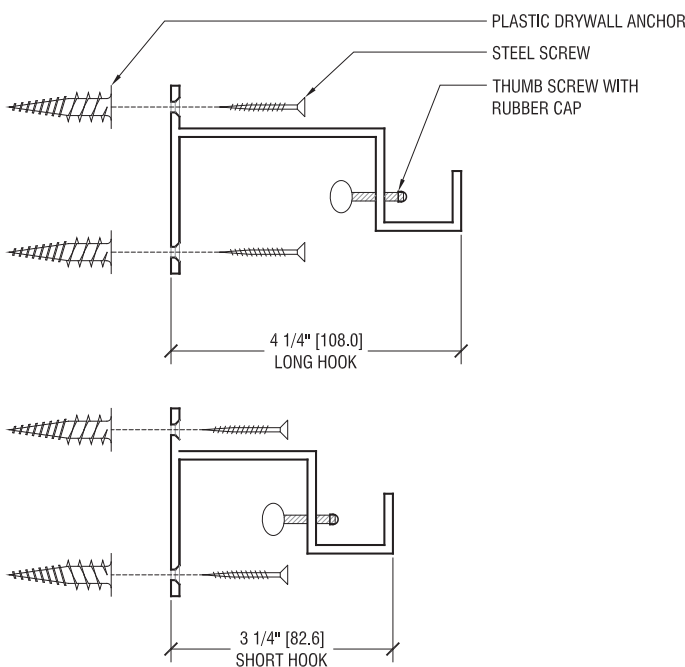


Figure 1. Pool wall-hook information

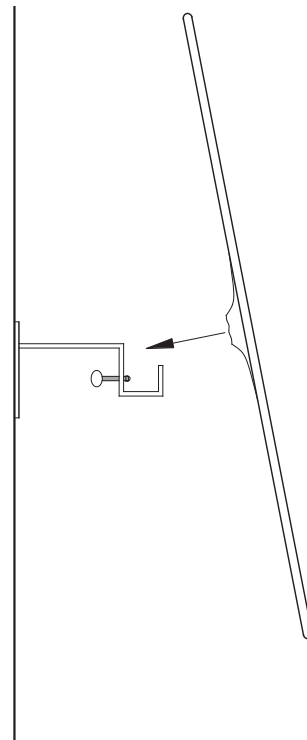


Figure 2. Hanging glass *Pool* object on hook

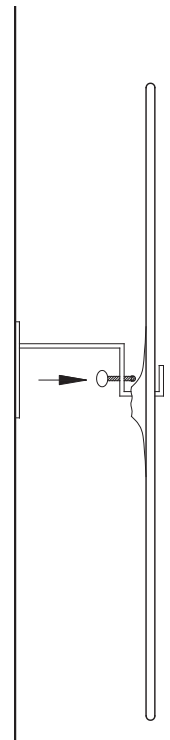


Figure 3. Tighten thumb screw against glass *Pool* object