

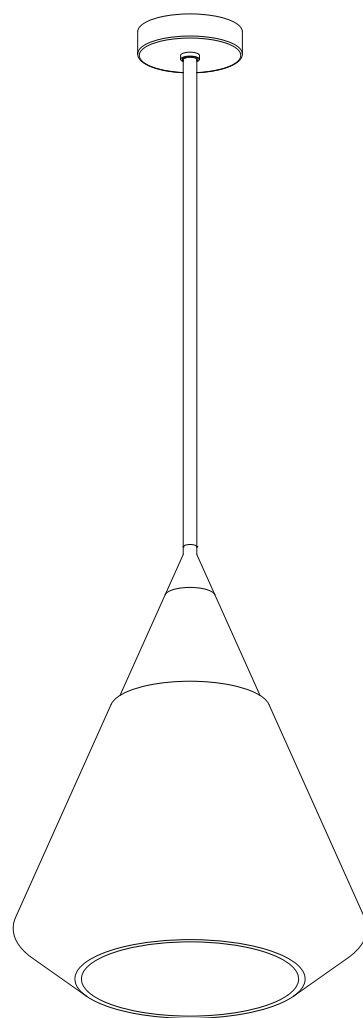


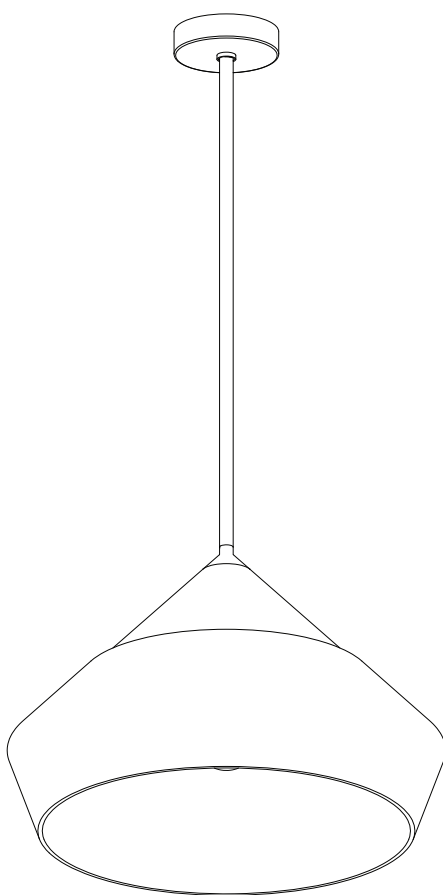

REST PENDANT

Installation Instructions

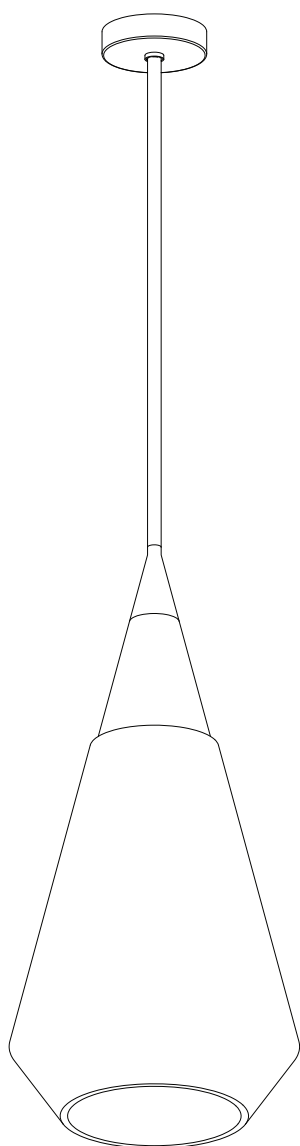

SkLO

sklo.com

SkLO US 115 WEST NORTH STREET HEALDSBURG CALIFORNIA 95448 USA +1.707.385.2101 us@sklo.com
SkLO EU BRATŘÍ ŠTEFANŮ 902/71 500 03 HRADEC KRÁLOVÉ CZECH REPUBLIC +420.495.542.071 eu@sklo.com




REST PENDANT


Congratulations on your purchase of a SkLO Rest Pendant. This product must be installed in accordance with the applicable codes by a person (two persons required) familiar with the construction and operation of the product and the hazards involved, preferably a licensed electrician. Use a maximum 60W bulb.


When unpacking individual items and parts of the light fixture, make sure to lay them out on a protective surface that will neither mar the delicate metal finishes nor scratch the glass. Gloves (nitrile) are provided and must be worn during installation to avoid fingerprints on the finish of the exposed metal parts.

Your SkLO fixture will arrive with the hand-blown glass elements packed separately from the light fixture itself.

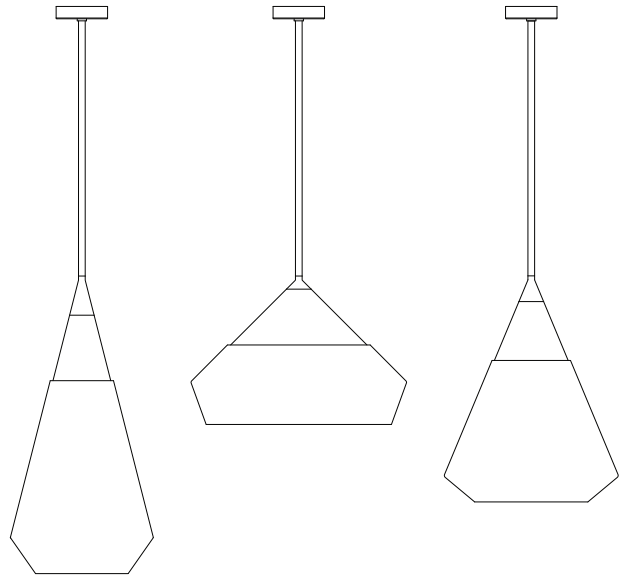

CONTENTS:

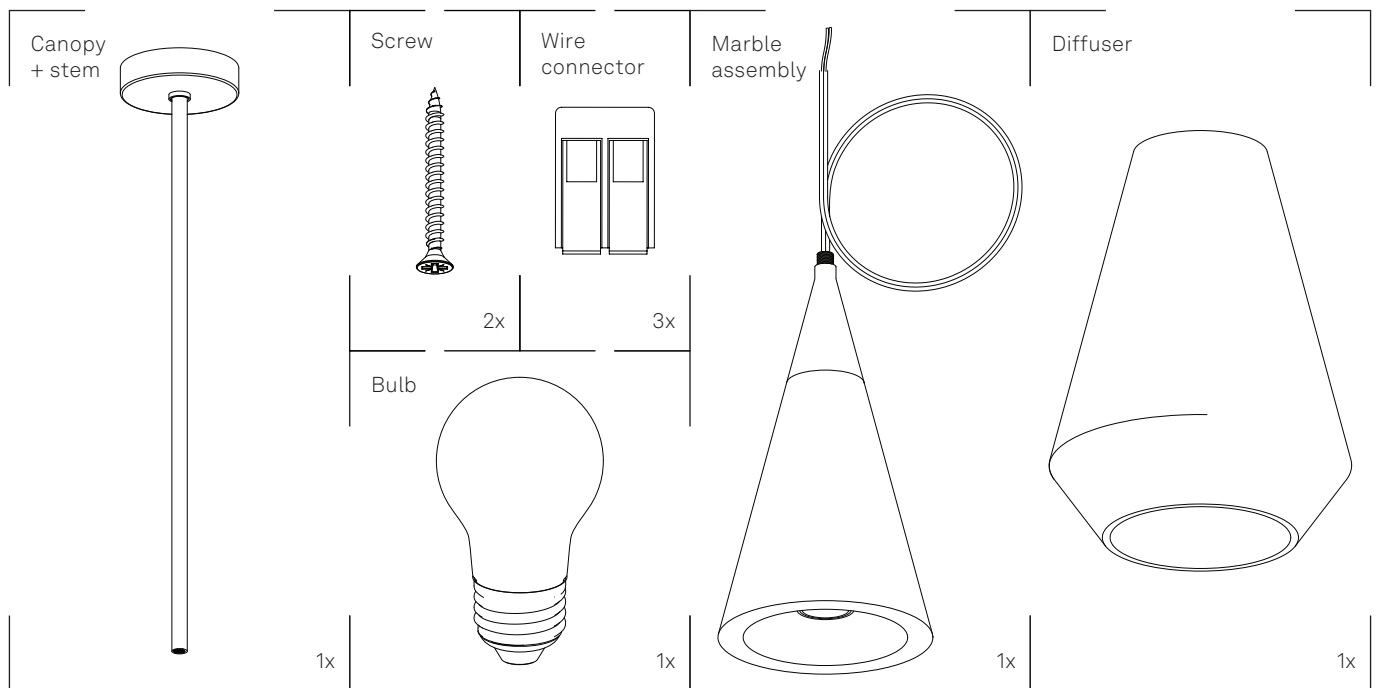



1. Feed the exposed wires at the top of the marble assembly through the stem/canopy with the female/internal thread facing down. Attach the stem to the fixture by threading it onto the exposed nipple at the top of the marble assembly. Place the assembly on a clean surface in a way that the marble sits on its flat surface (Figure 1).


For lights with longer OAD lengths, the stem will be in multiple parts. Uncoil the electrical wiring at the top of the fixture and carefully pass the wires through each stem as you fasten them together. To connect the stems, first, attach one of the lengths of the stem to the fixture by threading the open female/ internally threaded end of the stem onto the exposed threaded nipple on the top of the fixture (Figure 1). Then, attach the remaining stem lengths by threading the open end of each stem onto the exposed nipple of the other (Figure 2).

2. Carefully slide the glass diffuser onto the marble assembly, then position it on the same surface as the marble assembly to ensure both pieces are aligned. Handle the glass diffuser with care to avoid chipping or breaking, especially when moving it along the marble. Be cautious not to bump the marble (Figure 3).
3. Carefully unscrew the canopy nut and slide it together with canopy over the stem (Figure 4.) Take great care when sliding the canopy nut and the canopy so that they do not slip and scratch the stem or other parts of the pendant.
4. The mounting plate installs directly to the pre-drilled holes with inserted anchors (not provided) that are appropriate to the ceiling material. Align the mounting plate so it sits flush against the ceiling. Taking care that no electrical cables or connections are exposed where the mounting plate meets the ceiling. Fasten the mounting plate to the ceiling by screwing the two provided screws through the holes provided in the mounting plate, making sure that the mounting plate sits flush against the ceiling finish surface (Figure 5). Take great care when installing screws so that tools do not slip and scratch the pendant finish.


5. For lights with longer overall lengths (OAL) where the stem is composed of multiple parts, adjust and secure the braided wire in position using a set screw on the side of the exposed threaded nipple. Use a wrench to tighten the set screw, ensuring it is fully tightened without interfering with the outer threads of the threaded nipple (Figure 4). Connect the exposed leads of the fixture to the exposed leads on the wall following the wiring diagram and using the provided wire connectors. Attach the ground (TE) wires to ground (TE) wires of the light fixture, phase 1 (L1) to phase 1 (L1) of the light fixture, neutral (N) to neutral (N) of the light fixture (Figure 6). Please note the number and type of wire connectors may vary.
6. Carefully slide the tooth lock washer and the canopy over the stem. Take care that no electrical cables or connection are exposed where the canopy meets the ceiling. Fasten the canopy by screwing the canopy nut onto mounting plate (2.5Nm for tooth washer up to M10 and 5Nm for tooth washer over M10) , making sure that the canopy sits flush against the ceiling finish surface (Figure 7). Take great care when installing canopy nut so that it does not slip and scratch the canopy finish.
7. Remove the protective packaging from the brass socket and install the supplied LED light bulb (60W Max) into the socket (Figure 8). This fixture uses E26 socket and light bulb. Always turn off the power to the fixture when changing the bulb(s).




1.

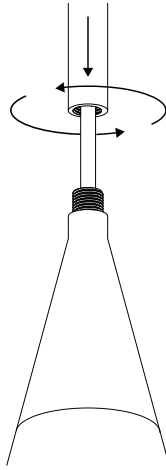

2.

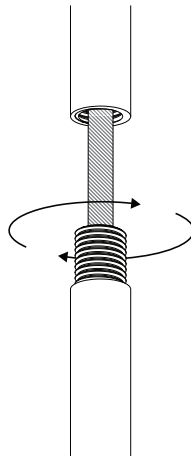


3.

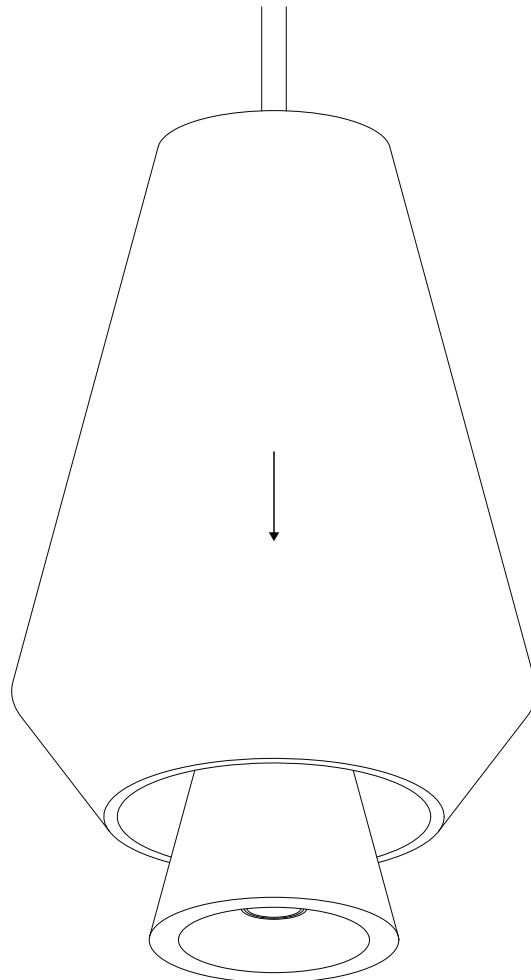





4.

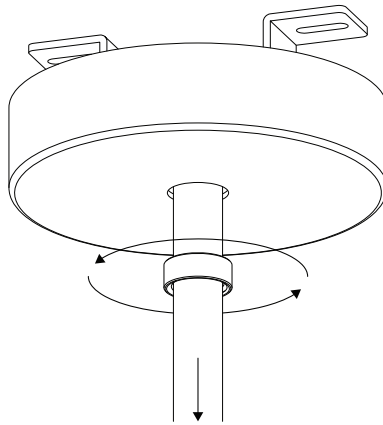


5.

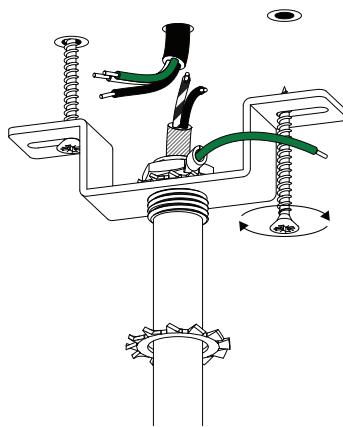

6.

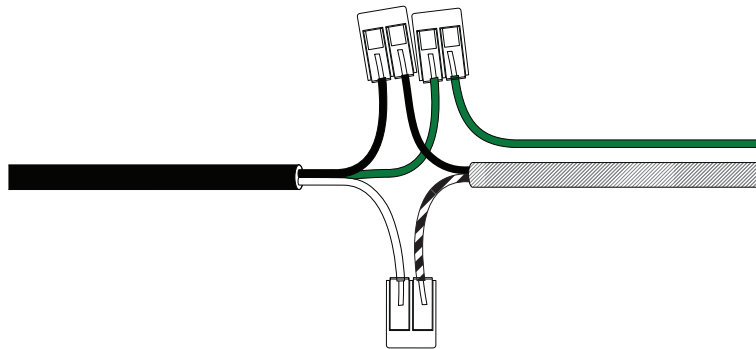


7.

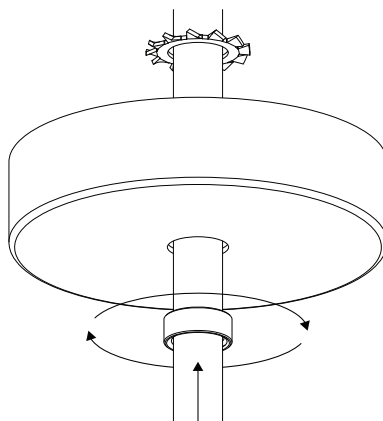



8.

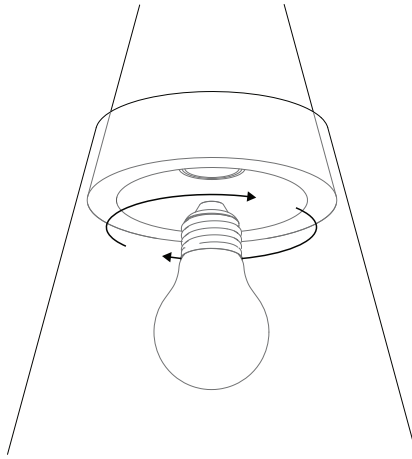

February 2025