


# SkLO

## Drape Arm Chandeliers Specification Guide

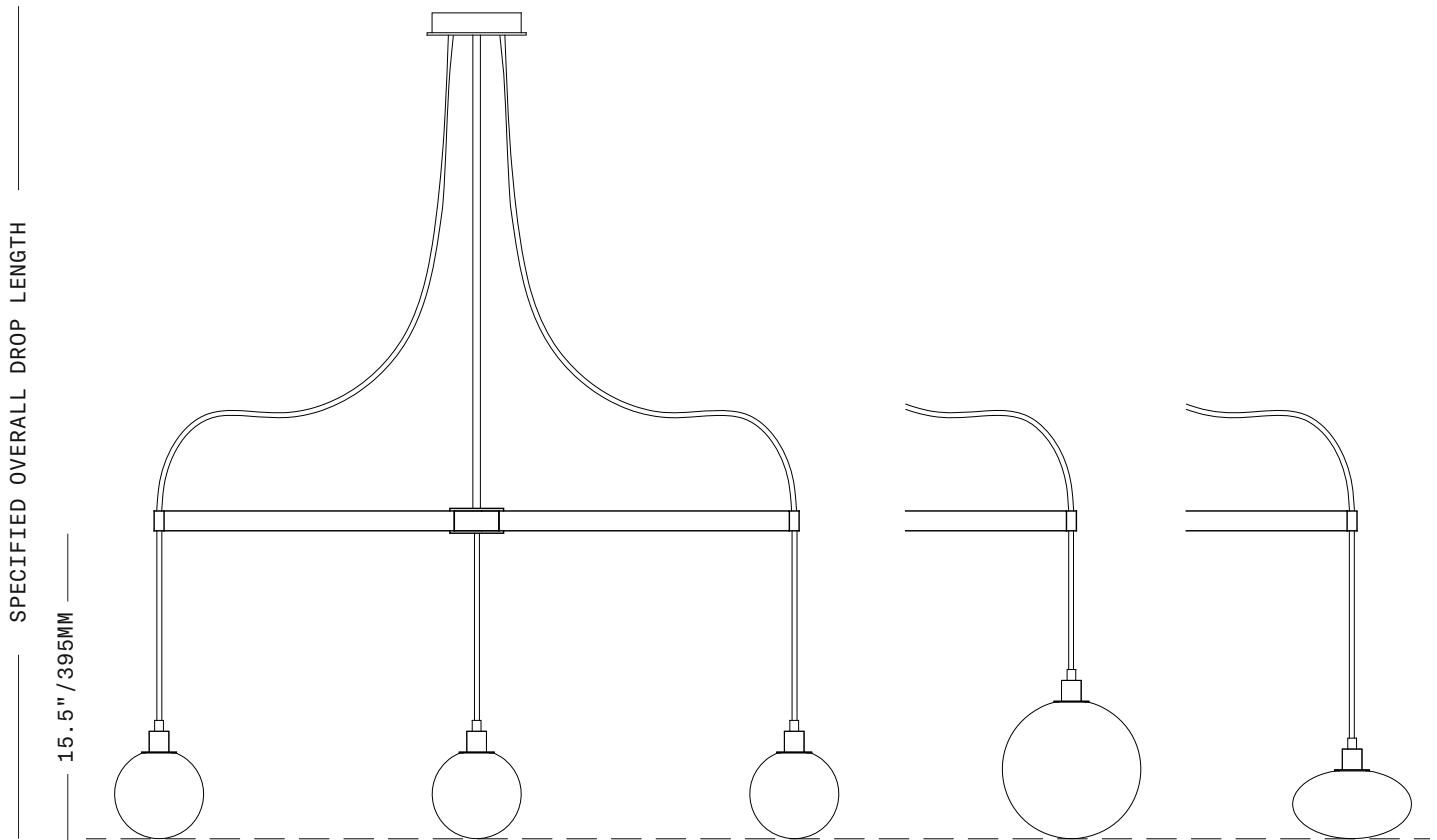

The Drape Arm Chandeliers are suspended on a rigid brass tube stem which is cut-to-order and is not field adjustable. The individual lit pendants of the chandeliers are suspended on fabric-wrapped electrical cords. These cords pass through the ends of the arms, and the arms hold the cord in place, setting the length of the cords and pendants below the arms.

The Drape Arm Chandeliers are assembled in our "standard composition" unless otherwise specified. The standard composition is the one typically shown in the drawings and images seen on the SkLO website, specification sheets, and other materials. The drawing above shows a Drape Arm 3 Chandelier in the standard composition. The standard composition always assumes a distance of 15.5" / 395mm from the bottom of the arms to the bottom of the glass diffusers. This dimension is the same for all three different glass diffuser shapes, as illustrated in the drawing.

To order a Drape Arm Chandelier with the standard composition, specify the overall length of the fixture desired. SkLO will produce your chandelier with the rigid brass stem cut to a length that achieves the specified overall length. SkLO will automatically include cord lengths for each pendant, long enough to achieve the standard composition and drape gracefully from the arms to the canopy. These cords are somewhat field adjustable, so small changes to the specified overall drop can be achieved during installation by slightly altering the lengths of the pendants below the arms.

Other compositions are entirely possible but must be specified at the time of order. For other compositions, SkLO will require both the length of the stem and the length of the cords for the pendants. Compositions other than the standard composition cannot be ordered via the SkLO website – specifications must be emailed to the SkLO client services at [us@sklo.com](mailto:us@sklo.com).

